
PLA MULTICOLOR

Datasheet

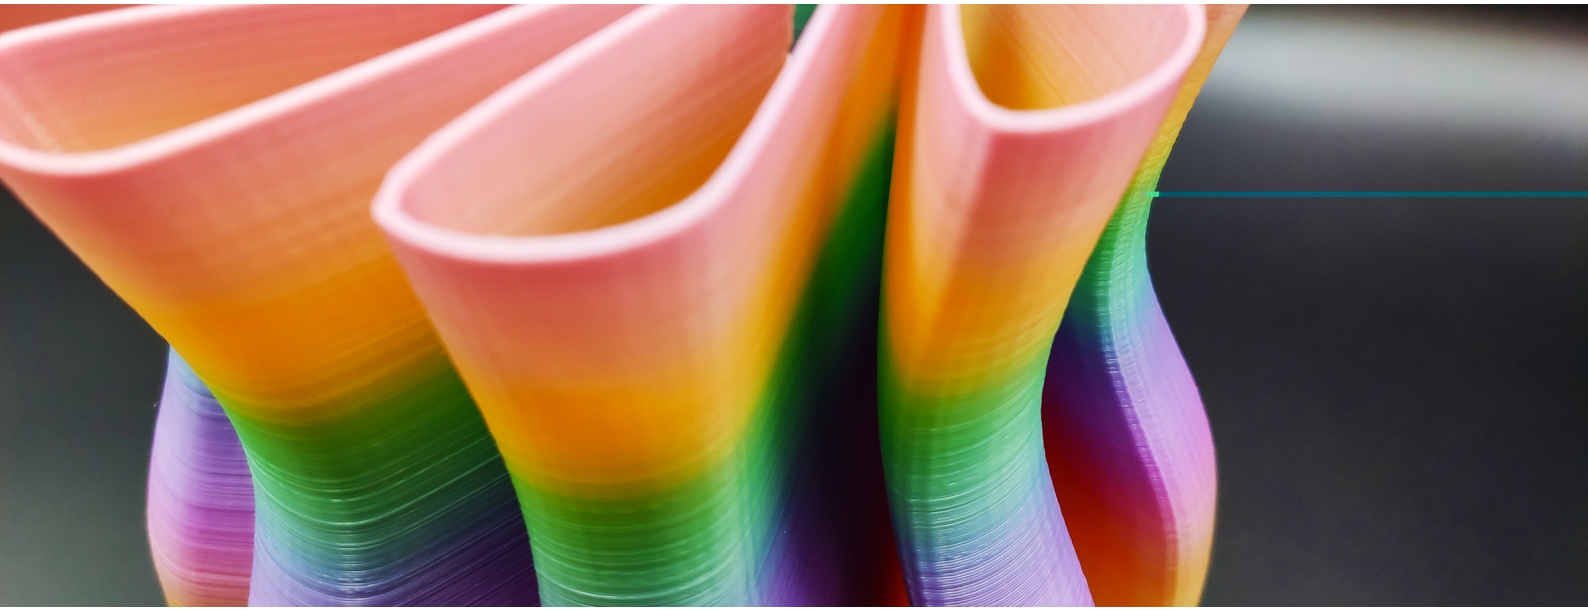

Density
1,24 g/cm^3 (23°C)

Melting point
160°C

Decomposition temperature
230°C

Recommended printing temperartue
210±10°C

Distortion temperature
70°C

Speed
6mm/min

Elongation
145%

Tolerance
1,75±0,03 / 3,00±0,05

First layer temperature
220°C

Heatbed temperature
50°C

Pack dimensions
235 x 215 x 80 mm

Pack weight
1,45 kg approx.

Melt index
-

Impact resistance
-

Our PLA PLUS presented in a coil that changes colour randomly. You won't find out how it looks until it's finished and no piece will look the same as the previous one!

PLA, polylactic acid, is a biodegradable thermoplastic polymer obtained from corn starch, potato, yucca or sugar cane. It is by far the most used material in FDM 3D printing.



- **The heatbed is optional**
- **It requires the use of laquer on the printing surface**

Products & Solutions globcl company

Saturn, 33
08228 Terrassa
Barcelona, Spain

Tel: (+34) 930027951
3dcpi@3dcpi.com
www.3dcpi.com